


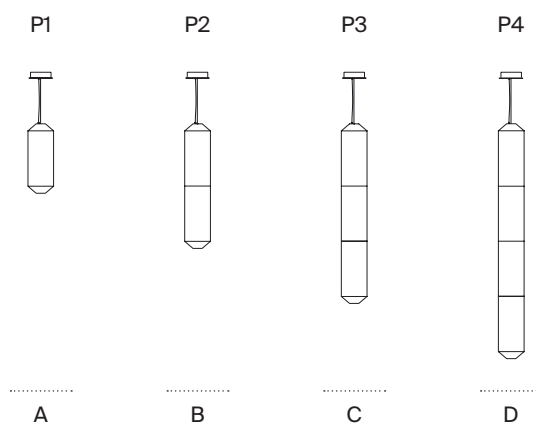

In its multiple sizes, Tekiò Vertical illuminates every space with intimacy. It gathers, inspires and enlightens. It sculpturally resolves spaces of varying heights by bathing them in uniform light. On its own or in repetition, its luminous intensity can range from a whisper to an exclamation.

General description:

Washi Japanese paper shade.

Metal structure.

Structure length:

(A) 67 cm / 26.4"

(B) 120 cm / 47.2"

(C) 173 cm / 68.1"

(D) 226 cm / 89"

White grey metallic circular ceiling plate with power supply incorporated.

Electric cable length: 5 m / 196.8"

Approximate weight (unpacked):

(A) Tekiò Vertical P1: 3 kg / 6.6 lb

(B) Tekiò Vertical P2: 4,5 kg / 9.9 lb

(C) Tekiò Vertical P3: 6 kg / 13.2 lb

(D) Tekiò Vertical P4: 7,5 kg / 16.5 lb

Tekiò Vertical

Anthony Dickens. 2017
Pendant lamps

Technical information:

Dimmable light source included
LED Module

(A)

Rated input wattage: 43 W (European version) / 34 W (American version)
Luminous flux: 1.251 lm (European version) / 964 lm (American version)

(B)

Rated input wattage: 73 W (European version) / 56 W (American version)
Luminous flux: 2.190 lm (European version) / 1.687 lm (American version)

(C)

Rated input wattage: 100 W (European version) / 73 W (American version)
Luminous flux: 3.128 lm (European version) / 2.315 lm (American version)

(D)

Rated input wattage: 120 W (European version) / 87 W (American version)
Luminous flux: 4.067 lm (European version) / 3.051 lm (American version)

(A, B, C, D)

Operating voltage: 24VDC

CCT: 2.200 K - 2.700 K

CRI: 90

Lifetime: 40.000 h

European version: suitable for dimming 1-10V / DALI. Not included external dimmer switch 1-10V / DALI.

American version: suitable for dimming 0-10V. Not included external dimmer switch 0-10V.

Upon request: CASAMBI regulation (bluetooth).


Dim to Warm control 2200 K- 2700 K.

Suitable only for indoor use.

Always use this light source.

Input voltage: 100 ~ 277 Vac.

(50 Hz / 60 Hz). According to destination.

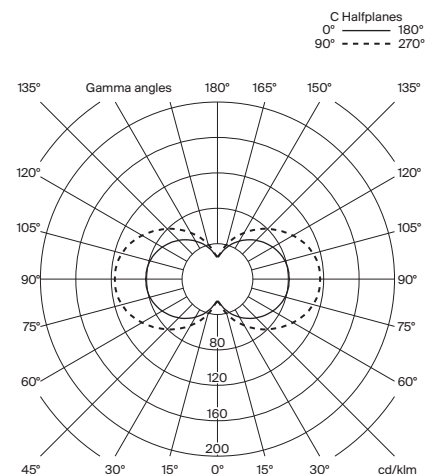

Regulations:

European version

UNE-EN 60598

UNE-EN 55015

UNE-EN 60529

American version

Dry location only

UL-1598

UL-8750

E-336377

Maintenance:

Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

Others:


The lamp is delivered in different packages.

The assembly instructions are delivered with the product.

Models / Codes: European Version




Tekiò Vertical P1

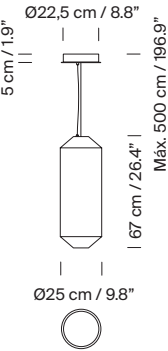


Code	Dimming
TKVPA01	1-10 V
TKVPA01D	DALI
TKVPA01C	CASAMBI

Tekiò Vertical P2

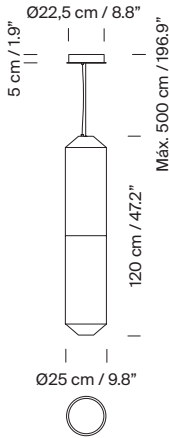


Code	Dimming
TKVPB01	1-10 V
TKVPB01D	DALI
TKVPB01C	CASAMBI

Tekiò Vertical P3

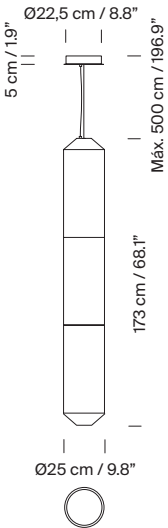

Code	Dimming
TKVPC01	1-10 V
TKVPC01D	DALI
TKVPC01C	CASAMBI

Tekiò Vertical P4

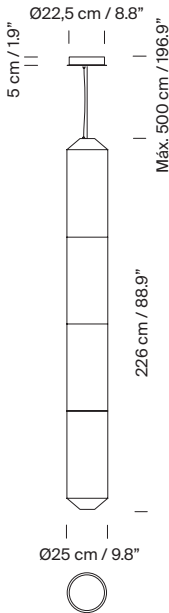


Code	Dimming
TKVPD01	1-10 V
TKVPD01D	DALI
TKVPD01C	CASAMBI

Models / Codes: American Version




Tekiò Vertical P1

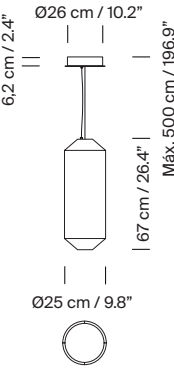


Code	Dimming
TKVPA01UL	0-10 V

Tekiò Vertical P2

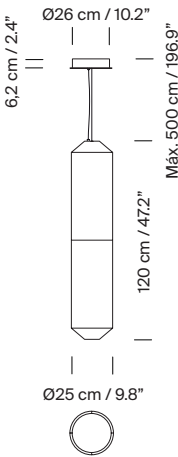


Code	Dimming
TKVPB01UL	0-10 V

Tekiò Vertical P3

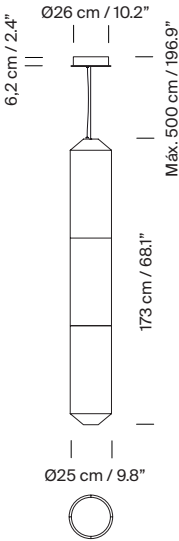

Code	Dimming
TKVPC01UL	0-10 V

Tekiò Vertical P4

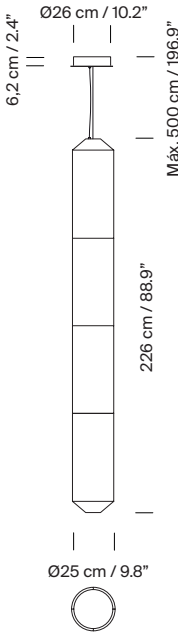

Code	Dimming
TKVPD01UL	0-10 V

Collection:
Pendant lamps



Tekiò Vertical



Tekiò Horizontal



Tekiò Circular